





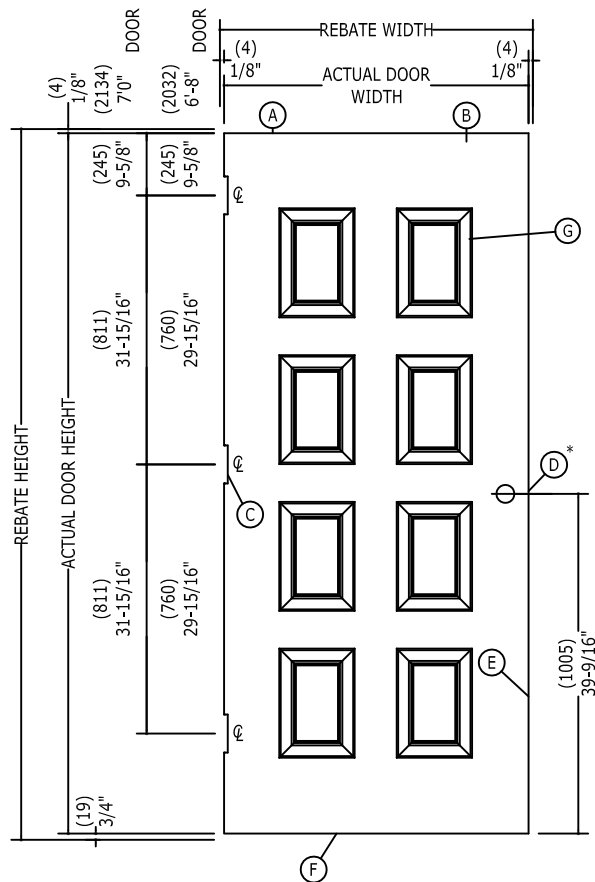


A. CLOSER REINFORCEMENT / TOP CHANNEL
14 ga. closer reinforcement,
fitted to 16 ga. inverted top channel




B. RIGID POLYSTYRENE CORE

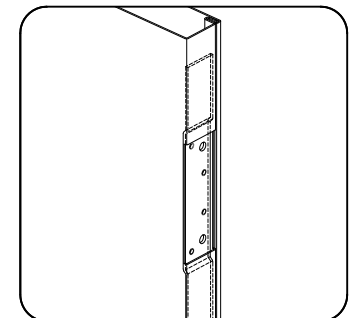


C. HINGE REINFORCEMENT
7 ga. hinge reinforcement (universal) for standard
or heavy weight 4.5" high template butt hinges




D. ANSI A115.1 #86
MORTISE LOCK REINFORCEMENT
14 ga. reinforcement with lock guide
D & T for #12-24 screw




*D. ANSI A115.2 #161
LOCK REINFORCEMENT (SHOWN)
14 ga. reinforcement, 2-3/4" backset
D & T for #8-32 screw

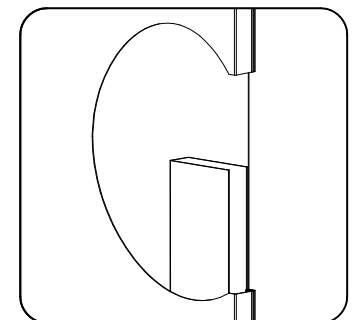


F. RIM PANIC REINFORCEMENT
14 ga. reinforcement
(includes reinforcement for surface
vertical rod or surface bolts)



G. BEVELLED EDGE
LOCK SEAM DESIGN
1/8" in 2"



H. BOTTOM CHANNEL
16 gauge inverted bottom channel



I. TYPICAL PROFILE
THROUGH EMBOSSEMENT

TECHNICAL SPECIFICATION:

Material:

A40 Galvanneal
18 Gauge Standard

Core:

POLYSTYRENE(STD.)

STC Rating

34

R-Value

6.60

Drawing No. D7

Date: 10/04/2012

DECORATOR SERIES DOOR (8 PANEL)

Drawn by: LX

PROJECT:

DAYBAR

SHEET:

○ OF ○